
THE UNIVERSITY OF SYDNEY

Interpretive Signs

Issue A

05.12.2007


INTERPRETIVE SIGNS

IN1 Pavement Interpretive Sign	3
IN2 Wall Mounted Interpretive Sign	5
IN3 Free Standing Interpretive Sign	8

Graphic Details


Interpretive text title cap X height = 35mm
 Interpretive body text cap X height = 25mm

Refer to sheet 2 for construction details

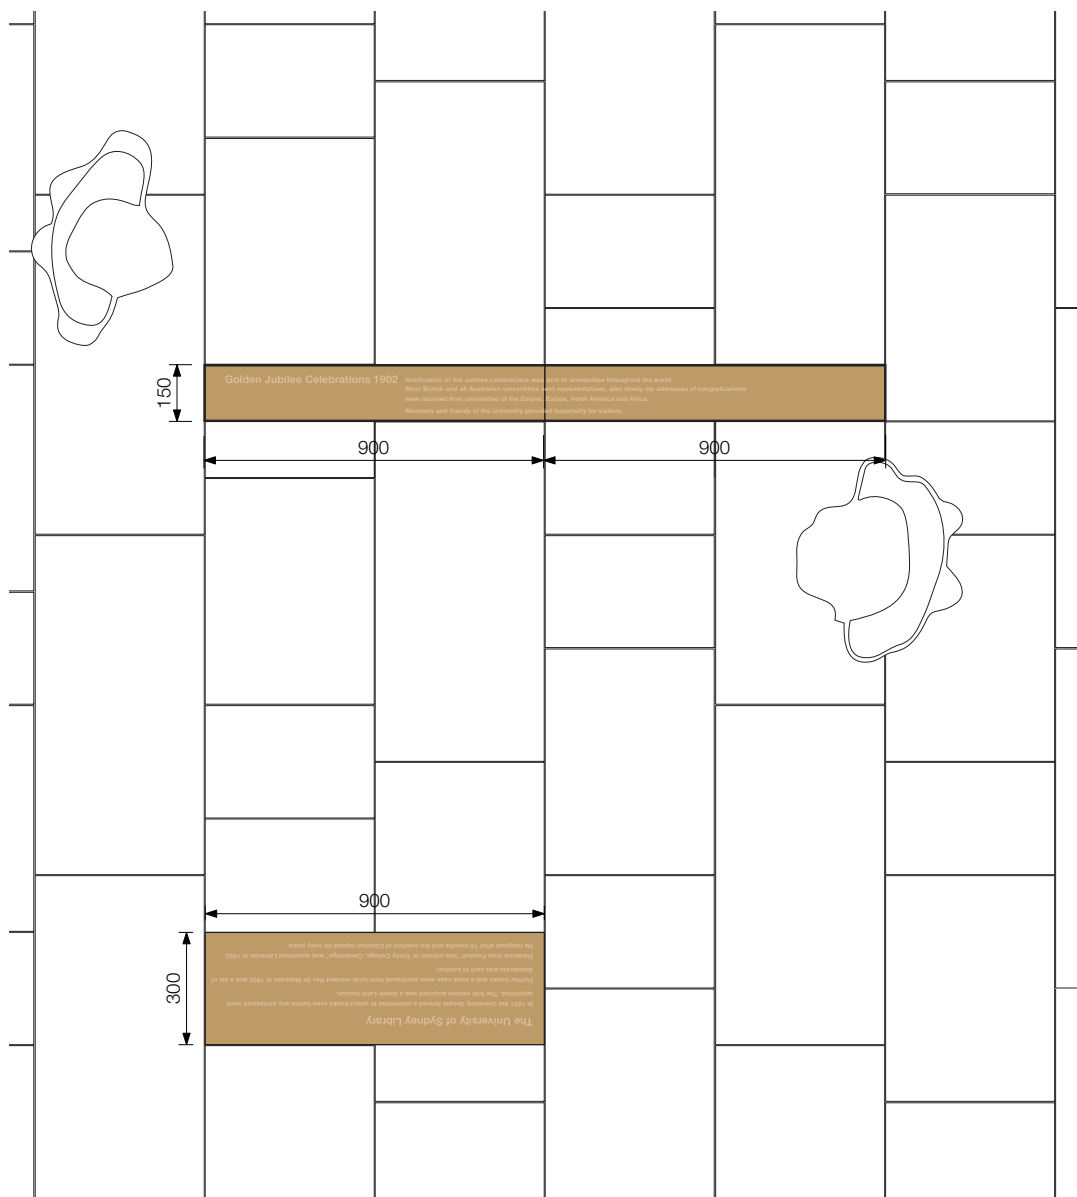

Typical Location


Scale 1:20

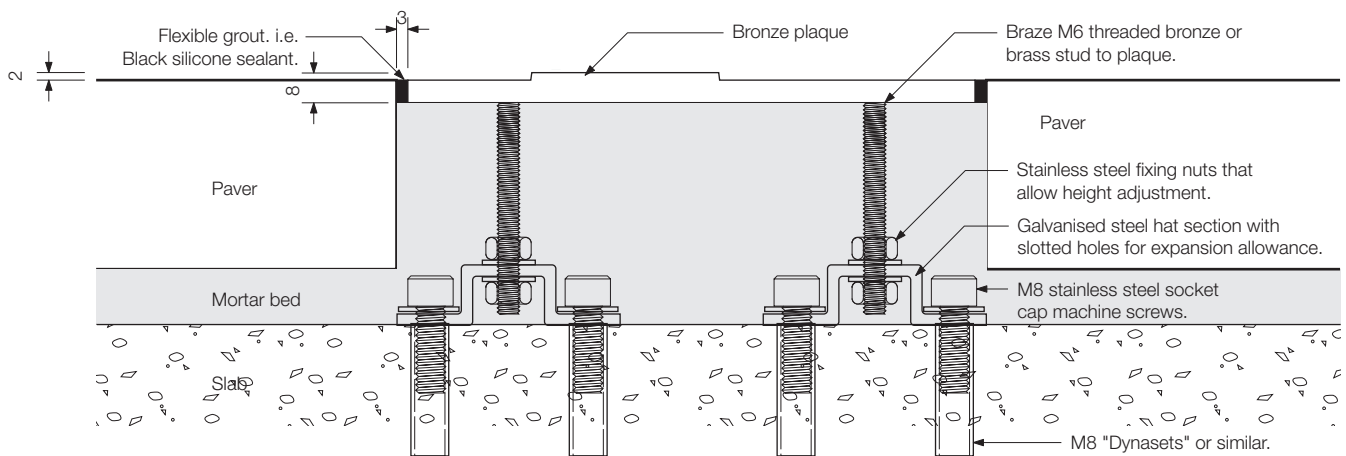**Section** Slotted Expansion Fasteners Fixing Detail

Scale 1:2

Note


These two Options are proposed only for situations where pavers cannot be removed for installation. This method will make the removal of the plaques very difficult but will allow plaques to be installed if paving has been installed prior to the plaques' installation. THIS IS NOT THE PREFERRED METHOD.

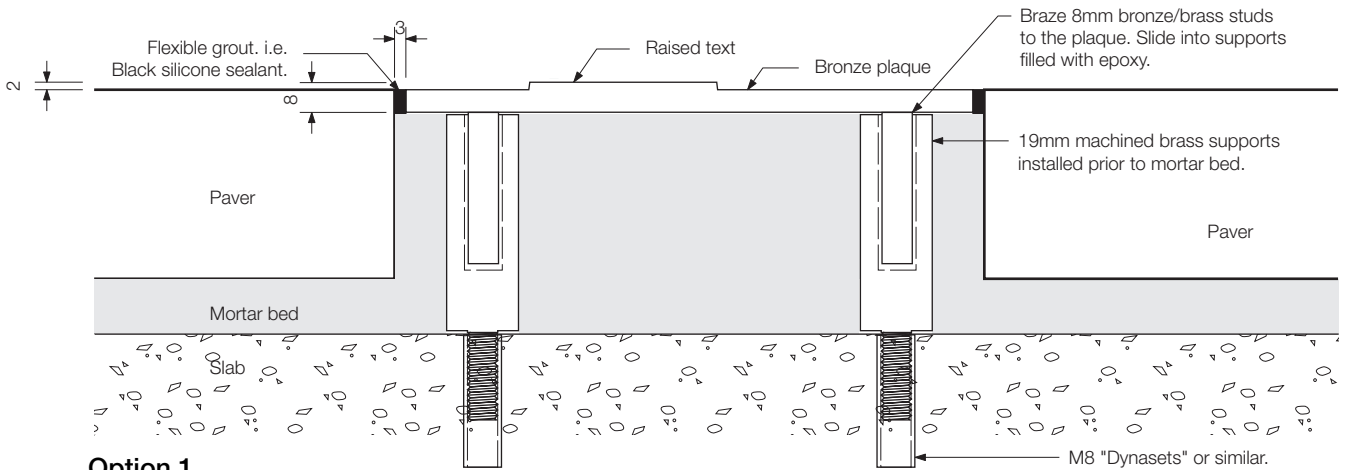

Option 1

Section Permanent Fixing Detail (if pavers cannot be removed for installation) Option 1

Scale 1:2

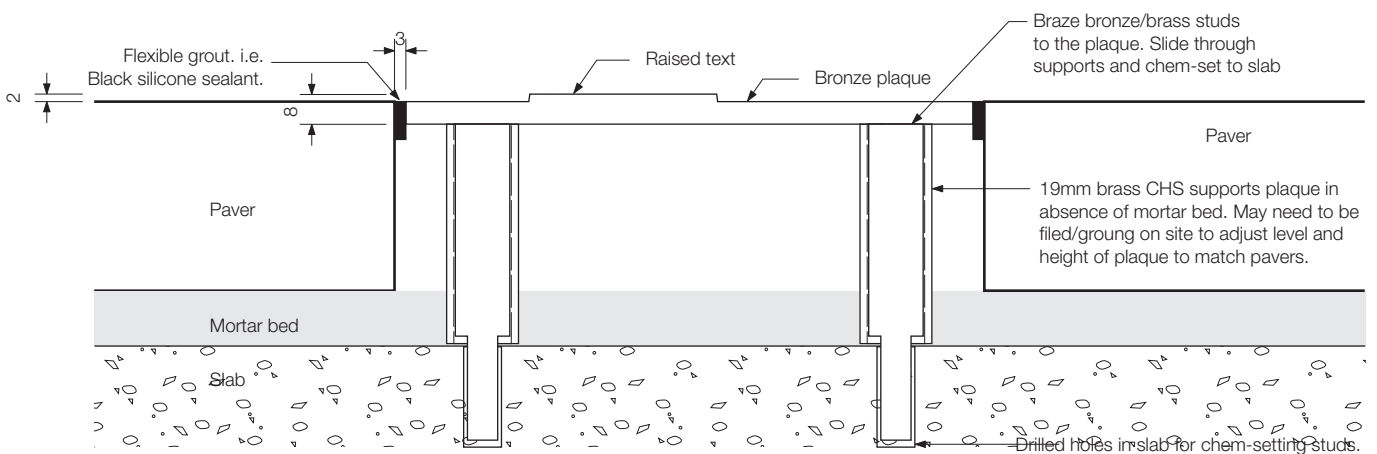

Option 2

Section Permanent Fixing Detail (if pavers cannot be removed for installation) Option 2

Scale 1:2

Graphic Details

Interpretive text title cap X height = 20mm
 Interpretive body text cap X height = 6mm


Colours**Option 1**

2 pac painted to match PMS Black.
 Graphic image 2 pac painted to match PMS 405C.
 Etch and paint filled graphics or silk screened. Text to match Dulux 'Vivid White' PCW B4

Option 2 (Bronze plaque)

Interpretive text title cap X height = 20mm
 Interpretive body text cap X height = 12mm

Refer to sheet 2 for Construction Details

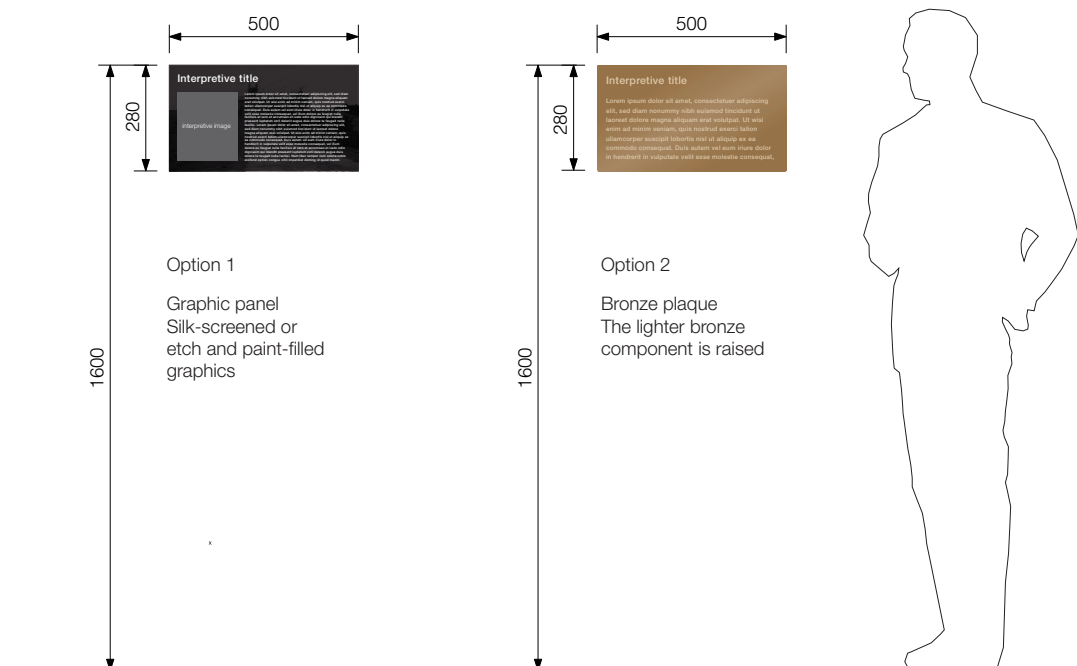**Typical Location**

Scale 1:20

Construction Details

Option 1

1. 6mm thick aluminium. Pencil round corners. Fine chamfer on edges.

2. Pins to fix panel to wall. 6mm rods welded to the back of the panel. Use non corrosive adhesives.


Photo or graphics and text to be etch and paint filled graphics or silk screened. Anti graffiti coating.

Option 2


1. Cast bronze plaque. , fine chamfer on edges

2. Pins to fix plaque to wall. Pencil round corners. Fine chamfer on edges. 6mm rods brazed to the back of the panel. Use non-acetic adhesives.

Refer to sheet 1 for Graphic Details

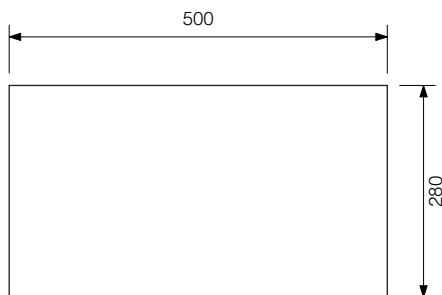

FRONT VIEW

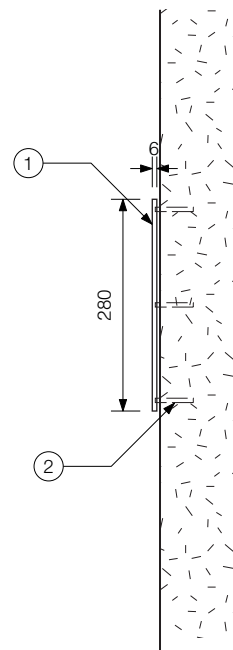

SIDE VIEW

Typical Location

Scale 1:10

Graphic Details


Interpretive text title cap X height = 20mm
 Interpretive body text cap X height = 6mm

Colours


Sign blade. 2 pac painted to match PMS Black.

Interpretive panel. 2 pac painted. Etch and paint filled graphics or silk screened. Graphic image 2 pac painted to match PMS 405C. Text to match Dulux 'Vivid White' PCW B4

Refer to sheet 2 for Construction Details




Expanded view of interpretive panel

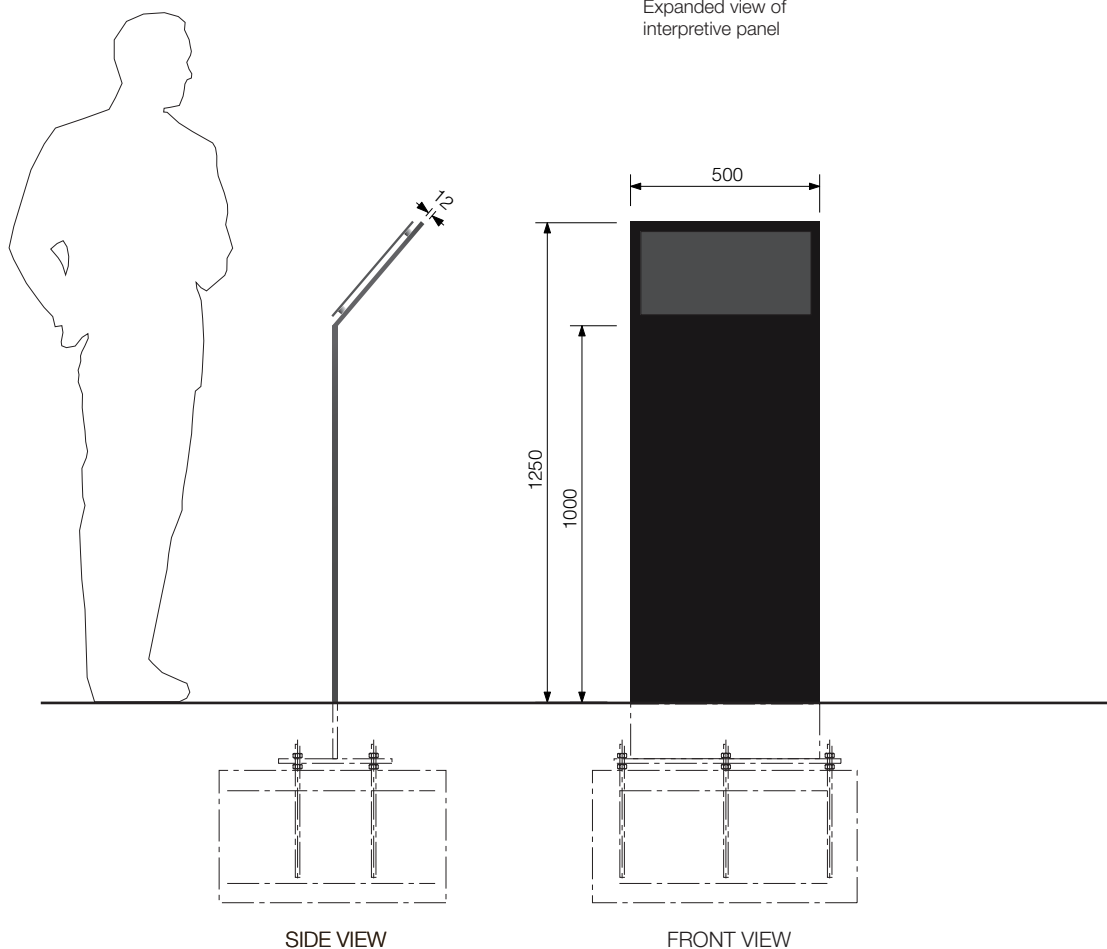**Typical Location**

Scale 1:20

IN3 Free Standing Interpretive Sign

sheet 2/2

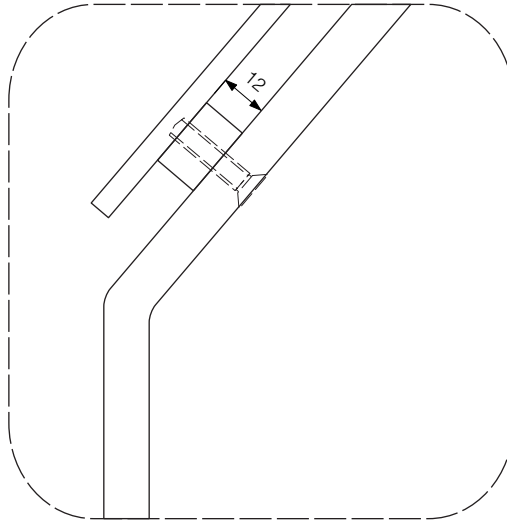**Construction Details**

1. Sign blade. 12mm thick, folded steel. Pencil round corners. 1mm radius on edges. Galvanised and 2 pac painted.


2. Interpretive panel. 6mm thick aluminium offset 12mm from steel sign blade. Pencil round corners. Fine chamfer on edges. Fastened with M6 counter-sunk socket machine screws (316 stainless steel) from the rear face of the sign. Photo or graphics and text to be etch and paint filled graphics or silk screened. Anti graffiti coating

- Concealed single pad footing or bored pier footing as required.

Refer to sheet 1 for Graphic Details

Detail 1

Scale 1:2

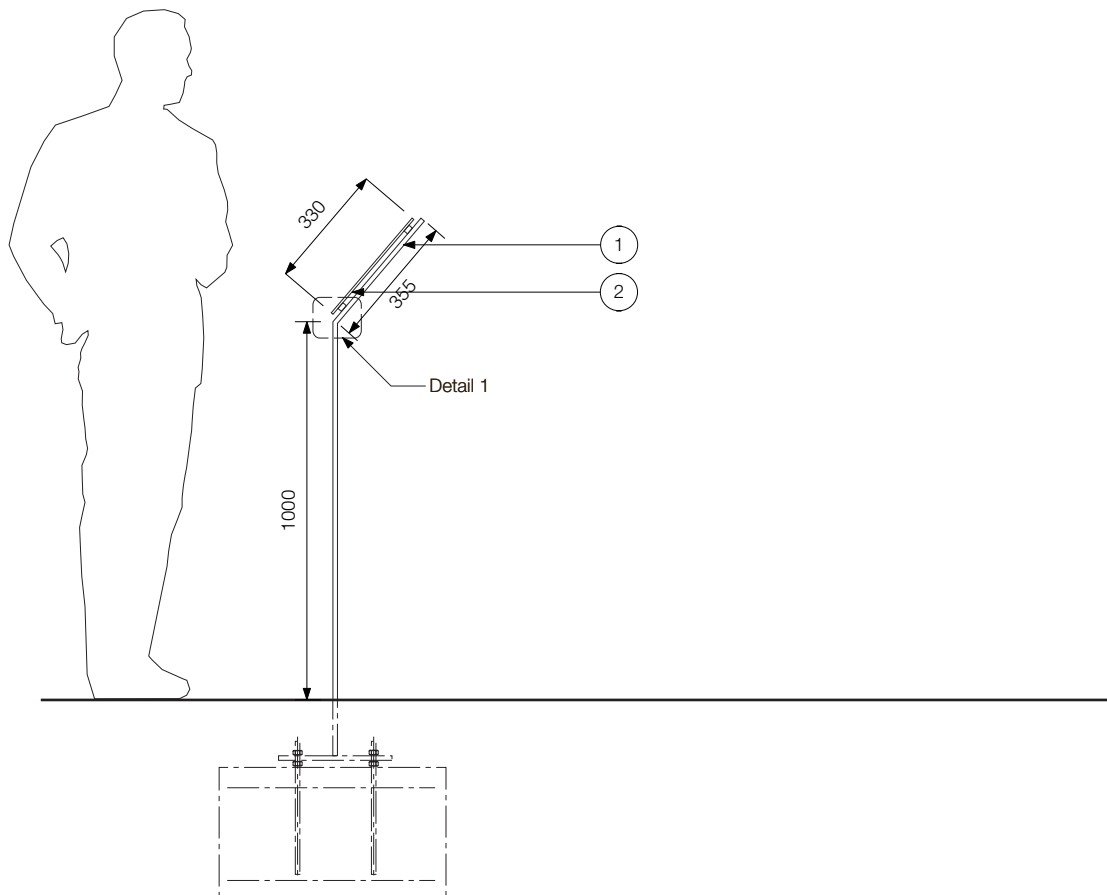**Typical Location**

SIDE VIEW

Scale 1:20